


FastTrack™

Job Sketch Request Form

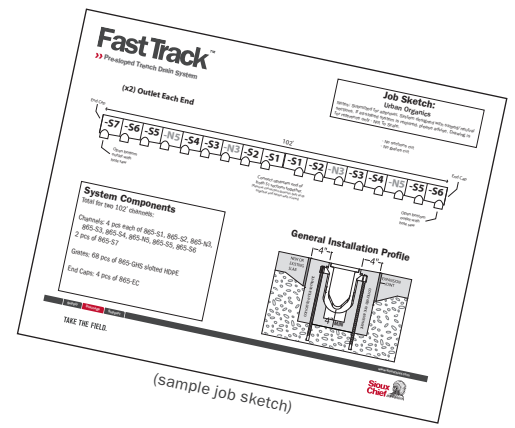

Project Name: _____


Overall Length: _____

For multiple systems, indicate individual channel lengths


- Length is critical - do not adjust
- Length can be optimized to use full-length sections

Slope Pattern:


- Slope to One End - Bottom Outlet
- Slope to One End - Side Outlet
- Slope to Each End - Bottom Outlet
- Slope to Each End - Side Outlet



- Slope to Center - Single Bottom Outlet



- Neutral (no slope) - Bottom Outlet



- Slope to Multiple Bottom Outlets (indicate number of outlets)



- Neutral (no slope) - Side Outlet

Grate Type:

- Ductile Iron - Slotted
For loads up to Class C, or Class D with iron frame.
- Ductile Iron - Cross-slot
For loads up to Class C. (ADA)
- Ductile Iron - Diagonal Slot
For loads up to Class C. (ADA/heel-proof)
- Galvanized Steel - Slotted
For Class A loads.
- Galvanized Steel - Perforated
For Class A loads. (ADA/heel-proof)
- Ductile Iron Grate Frames

- Reinforced Galvanized Steel - Slotted
For loads up to Class C.
- Stainless Steel - Slotted
For Class A loads.
- Stainless Steel - Perforated
For Class A loads. (ADA/heel-proof)
- Reinforced Stainless Steel - Slotted
For loads up to Class C
- HDPE - Slotted
For Class A loads.
- Stainless Steel Edge Guards

Special Notes/Instructions:

Use the area below to provide a drawing of the system if needed