

# OxBox™

Supply Access Box for Kitchens



## Fast

Installs quickly with supply from above or below.

Valves are installed at rough, keeping them on test throughout the job. No drain down.

## Reduced Liability

Fewer potential leaks. Don't cut into the lines at finish.

No wobbly stub outs, exposed tube/joints, inferior valves, or unsure bracketing.

## Standardized

Installations are consistent – Clean, solid and professional.

Valves are replaceable with standard 5/8" OD supply stops.

Replaces variability in installation of stub out, bracket, escutcheon, and valve.



Supply

Drainage

Support

Specialties

[www.siouxchief.com](http://www.siouxchief.com)

TAKE THE FIELD.



## Double Valve Flow @ 60 psi Static


**One-Fixture  
Water Demand** (single outlet use)  
5.1 GPM (top or bottom outlet)

**Two-Fixture  
Water Demand** (simultaneous use)  
2.0 GPM (top) | 3.3 GPM (bottom)

Optional arresters for quick-closing dishwasher and icemaker valves.

All valves include nylon, hex test cap. Holds test and limits access by other trades to valve connection

Captured 5/8" compression thread valve base works with all common valves. Easily replaceable

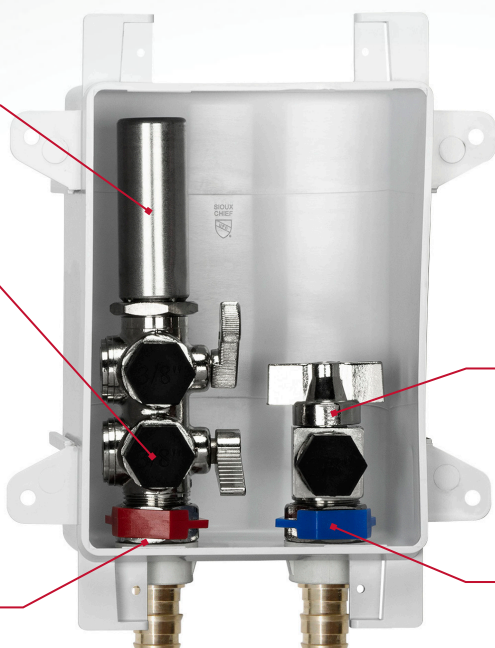

Attractive, plated valves with easy-grip handles

Red and Blue clips provided with all valves. Attach to indicate hot/cold lines



696-G3011WR



696-G4021WR



696-1F

### Buying Information

1/2" MALE CPVC ITEM NO.	1/2" MIP/ESWT ITEM NO.	1/2" MSWT* ITEM NO.	1/2" F1960 PEX ITEM NO.	1/2" F1807 PEX ITEM NO.	DESCRIPTION	MIN. QTY.	CASE QTY.
<b>OXBOX™ SUPPLY BOX with THREE Valve Outlets</b>							
696-G3011CR	696-G3011MR	696-G3011PR	696-G3011WR	696-G3011XR	TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet	10	10
696-G3014CR	696-G3014MR	696-G3014PR	696-G3014WR	696-G3014XR	ONE 3/8" Hot Outlet ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester	10	10
696-G3021CR	696-G3021MR	696-G3021PR	696-G3021WR	696-G3021XR	TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet, Cold-Side Arrester	10	10
696-G3024CR	696-G3024MR	696-G3024PR	696-G3024WR	696-G3024XR	ONE 3/8" Hot Outlet, Hot-Side Arrester ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester	10	10
<b>OXBOX™ SUPPLY BOX with FOUR Valve Outlets</b>							
696-G4021CR	696-G4021MR	696-G4021PR	696-G4021WR	696-G4021XR	TWO 3/8" Hot Outlets, Hot-Side Arrester TWO 3/8" Cold Outlets, Cold-Side Arrester	10	10
696-G4024CR	696-G4024MR	696-G4024PR	696-G4024WR	696-G4024XR	TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester	10	10
<b>ACCESSORIES</b>							
696-1F	White OxBox frame - paintable ABS					10	10
697-1F	Stainless steel OxBox frame					10	10
696-SC1	OxBox frame insert with hose knockout					10	10
696-EX	OxBox frame extension					10	10
305-RT	Grommet removal tool - use to remove valve from box					10	10

\* Male sweat connections are Press/Push-fit compatible