

MULTI-TURN WATER SUPPLY STOPS

/// 133-G SERIES STRAIGHT STOPS

SPECIFICATION

Tomahawk 133 series Multi-Turn Water Supply Stops shall be used as a means of controlling pressure water connections to plumbing fixtures for the purpose of being able to turn off flow for repairs or emergency situations.

INSTALLATION

Attach to pressure piping as prescribed by inlet connection on stop valve. Connect supply hose of desired configuration to outlet of supply.

MATERIALS

Valve body: no lead brass
Sleeve: brass
Nut: brass
Finish: chrome or rough brass

FEATURES

- certified to NSF/ANSI 61 section 9-G
- IAPMO listed
- no lead brass

PACKAGING

Individually boxed or individually bagged

PRESSURE & TEMPERATURE

Maximum pressure: 125psi, 8.6 bar
Maximum temperature: 160°F, 71.1°C

DIMENSIONS

*Tomahawk specifications in US customary units are approximate and are provided for reference only.

	-G1F1C	-G2C1C	-G2C1CR1	-G2F1C	-G2S1C	-G2S1CE5	-G2S1CR1	-G2V1C	-G2V1CR1	-G2X1C
A: handle	2"	2"	2"	2"	2"	2"	2"	2"	2"	2"
B: height	2.5"	2.25"	2.25"	2.25"	2.25"	2.25"	2.25"	2.875"	2.875"	2.25"
C: length	2"	2.25"	2.25"	2.062"	2.5"	7.625"	2.5"	2.5"	2.5"	2.25"


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



133-G2S1C04



133-G2C1C04

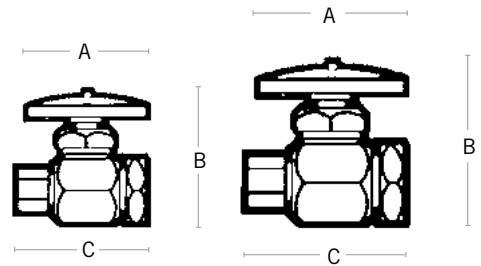

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.



Create Item Number

133-G A B C D

e.g. 133-G2C1C01: straight stop, 5/8" O.D. compression X 3/8" O.D. compression multi-turn, chrome, 1/bg

INLET CONNECTION A

- 1F = 3/8" FIP
- 2C = 5/8" compression
- 2F = 1/2" FIP
- 2S = 1/2" female sweat
- 2V = 1/2" CPVC
- 2X = 1/2" PEX F1807

OUTLET CONNECTION B

- 0C = 1/4" compression
- 1C = 3/8" compression

OPTION C

- E5 = 5" extension w/ escutcheon
- R1 = rough brass

PACKAGE D

- 01 = individually bagged
- 04 = individually boxed



*Not all combinations available. Contact your local rep to confirm availability.