

SIDE-OUTLET MAIN ROOF DRAIN

» 868 SERIES

SPECIFICATION

Sioux Chief 868 Series 15" diameter roof drain with side outlet. Coated cast iron body with combination membrane flashing clamp/gravel guard and vandal-resistant, low profile dome strainer. Designed in accordance with ASME A112.6.4

Used on any type of flat roofs. Low profile dome prevents debris from entering the drain line. The anchor flange and membrane clamp provide a secure grip of membrane and roof flashing materials.

MATERIALS

Dome strainer: cast iron, ABS, aluminum


Gravel guard: cast iron

Drain body: cast iron

STRAINER FREE-AREA

105.3 in²

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

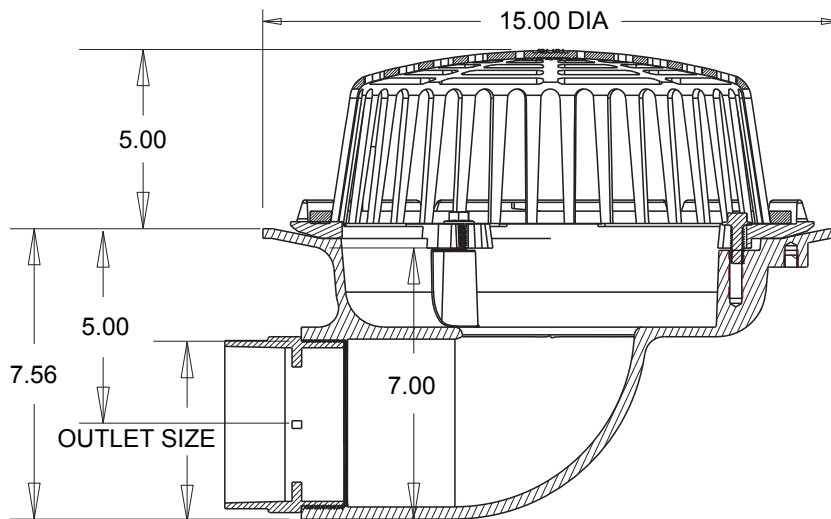

Create Item Number

868-ABC

e.g. **868-523B9SC**: Roof drain with 3" No-Hub side outlet, ABS dome, sump receiver and underdeck clamp kit

CONNECTION A

523 = 3" No-Hub - side outlet

524 = 4" No-Hub - side outlet

DOMESTRAINER B

9 = Cast iron dome

B9 = ABS dome

A9 = Aluminum dome

OPTIONS C

2 = 2" high SS perf. extension

P = Top-mount sump receiver²

C = Underdeck clamp kit

G = 2" high SS perf. gravel guard

W = 2" high external water dam

D = 6" high SS perf. dome cover with removable top

4 = 4" high SS perf. extension

S = Sump receiver

E = Adjustable extension

H = 4" high internal water dam¹

K = 4" high SS perf. gravel guard

¹ Internal water dam can be cut/shortened by contractor as needed or per specifications | ² Includes sump receiver plate and drain-to-plate attachment hardware